



Roto Safe


General information

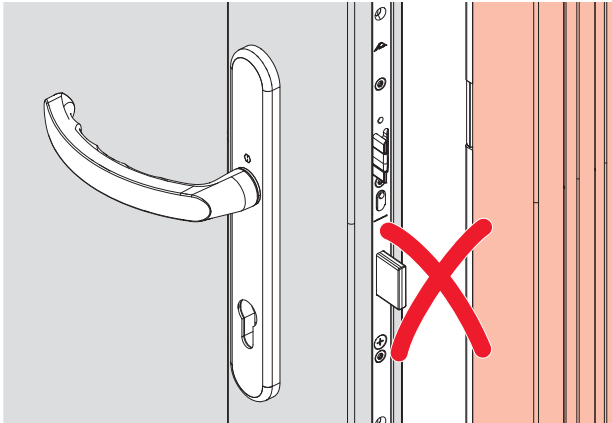


When the lock is extended, do not close the door or push it against the frame.

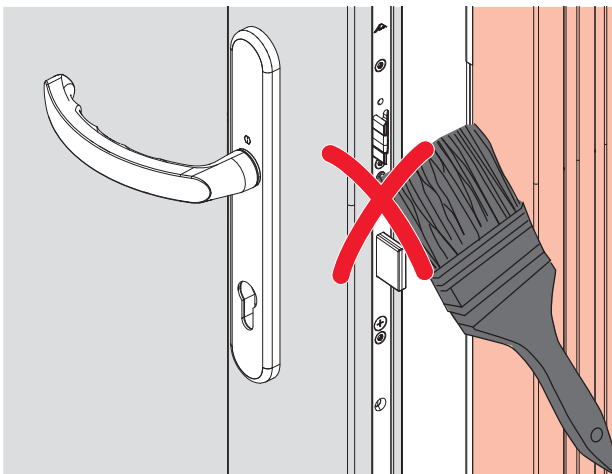


Do not paint over the lock or locking components (latch, deadbolt, additional lock, etc.).

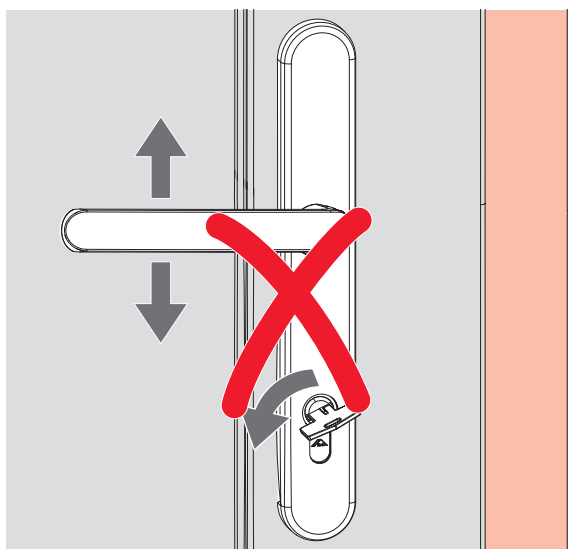


Do not actuate the door lever handle and profile cylinder at the same time.

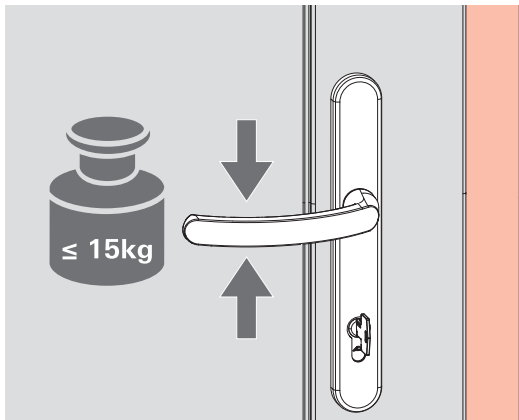


Do not place heavy loads on the handle; the maximum load is 15 kg.

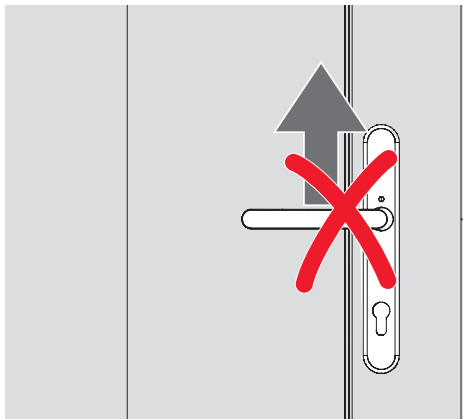

Do not carry the sash by the door lever handle.

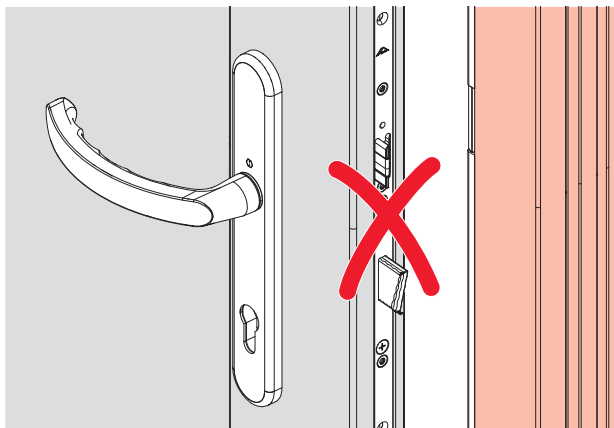

Where there are visible signs that force has been used, replace the lock and / or handle.

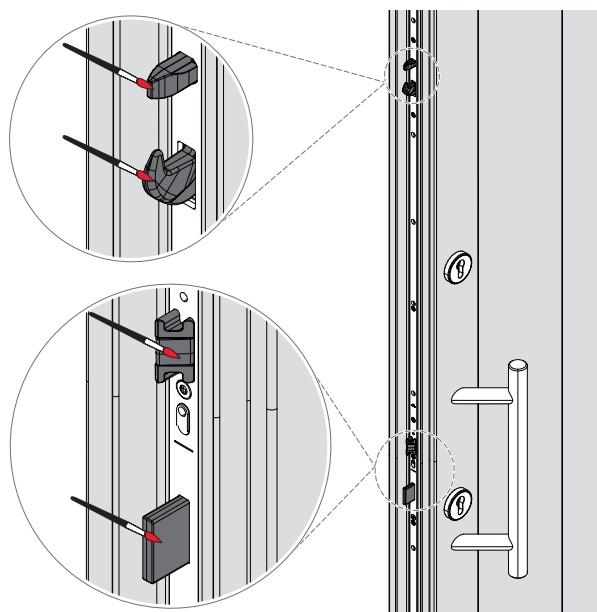

Lubricate locking components (latch, deadbolt, additional lock) at least once per year.



ATTENTION

Using incorrect lubricants may cause property damage.

Substandard lubricants can prevent the hardware from working properly.

- ▶ Use high-quality lubricants.
- ▶ Only use resin-free and acid-free lubricants.