




Roto Frame-Tec | Adjusting and mounting wedge

Product data sheet

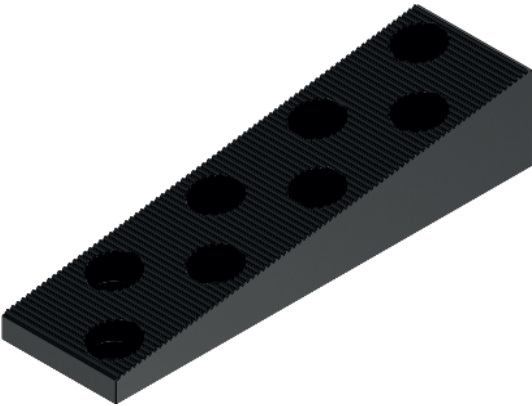

- Description** Adjusting and mounting wedge
- Dimensions** See Roto Fix&Glazing catalogue (CTL_15)
- Application** Compensating and aligning in window and door construction
- Raw material** ABS regrind (acrylonitrile butadiene styrene)

Material properties

		Test procedure
Modulus of elasticity	1700 MPa	ISO 178
Density	1.04 g/cm ³	ISO 1183
Hardness	104 R Scale	ISO 2039-2
Min. temperature	-30 °C	–
Max. temperature	+80 °C	–
Compressive load	74 MPa	ISO 2039-1
Thermal conductivity λ	0.17 W/mK	ISO 22007
Halogen-free	Yes	–
Toxicity in fires	Formation of CO / CO ₂ is very likely, large volumes of HCN	–
Fire behaviour	HB	UL 94
Construction material class	Class B 2	DIN 4102-1

Additional information

		Associated documents
REACH	Compliant	Available upon request