



Deventer Seals | DDM 1212

Product data sheet

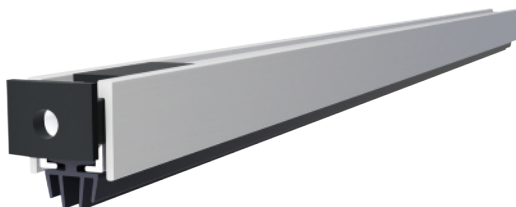

Description	Drop down seal Deventer Drop Down Seal Mini
Dimensions	12 mm x 12 mm
Application	Automatic drop down seal with single-sided triggering / trigger mechanism: square
Application area	Doors, interior doors
Raw material	Untreated aluminium

Material properties

	Property
Outer profile	Raw material: 6060 T6 aluminium alloy
Inner profile	Raw material: 6060 T6 aluminium alloy
Surface	Raw material: Untreated aluminium
Trigger mechanism	Raw material: nylon PA6 30% glass fibre-reinforced
Seal	Model type: Therm A
	Four-lipped co-extruded self-extinguishing thermoplastic seal
	Raw material: PVC
	Colour: black
Trigger mechanism	Trigger mechanism made from nylon-coated steel, can be adjusted with a 3 mm hex key
	Model type: 23
	Raw material: nylon PA6 30% glass fibre-reinforced
	Colour: black

Technical properties

		Test procedure
Max. travel	8 mm	-
Operating temperature	-20 °C / +80 °C	-
Installation type	Screws (not included)	-
Working cycles ^[1]	> 200,000	Internal

Additional information

		Associated documents
REACH	Compliant	Available upon request
EPD	Not available	-

[1] Details of passed tests and durability in accordance with EN 1191:2012-12, classified in accordance with EN 16034:2014-10, provide information about the basic suitability of the mechanics. In individual cases, depending on the material of the door leaf or the type of hinges, different results may also be achieved here.