


Roto Solid B | 222 P

Hinge retaining mechanism

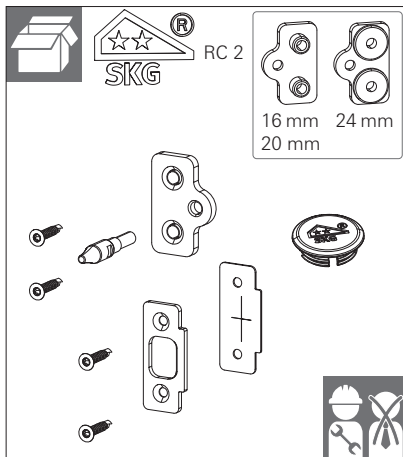

INFO

SKG**

- Hinge retaining mechanism required for outward opening doors.
- Use 3 or more hinges.

INFO









The fixing screws (6.3 x 40, 6.3 x 50 or 6.3 x 60) supplied with the butt hinge must be used for hinge installation.

Screw lengths may vary depending on the profile system.

Pay attention to the installation drawing.


INFO

Note the routing drawing.

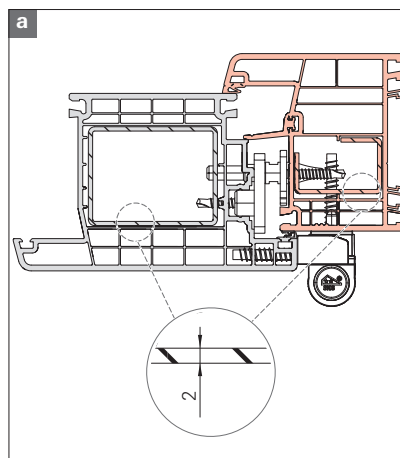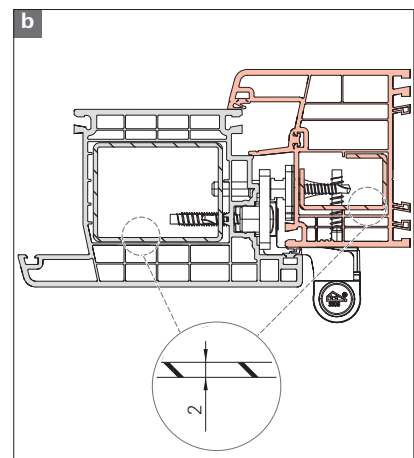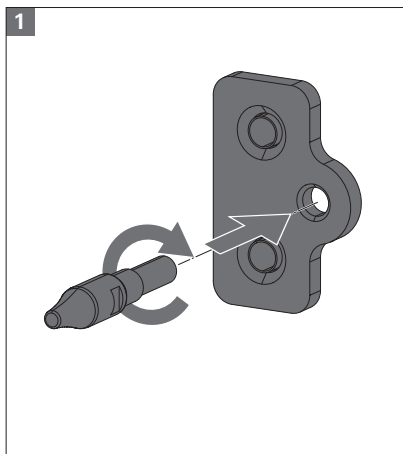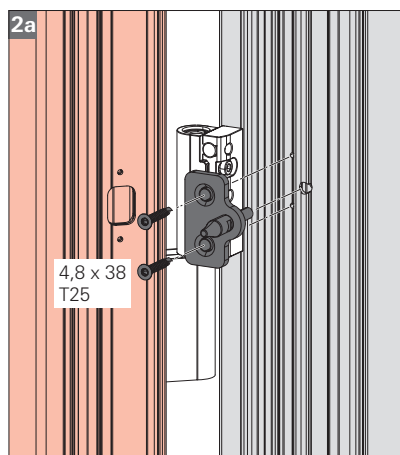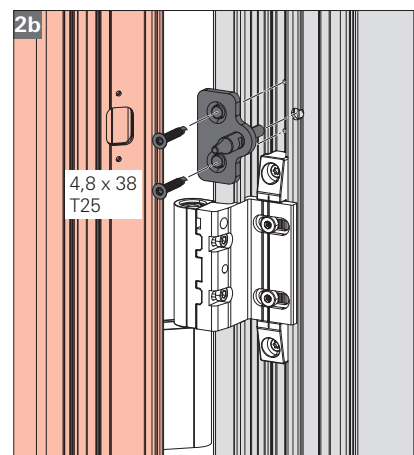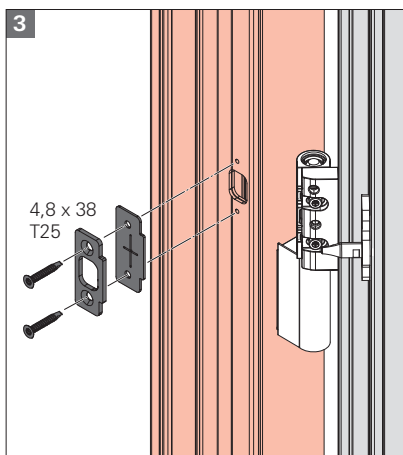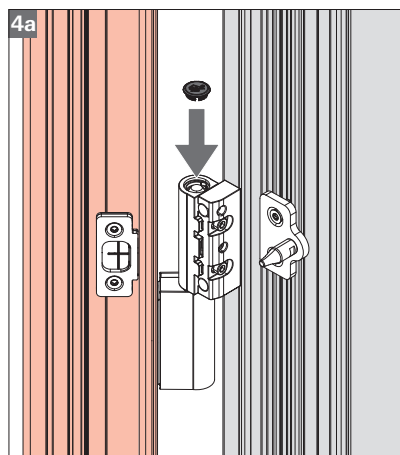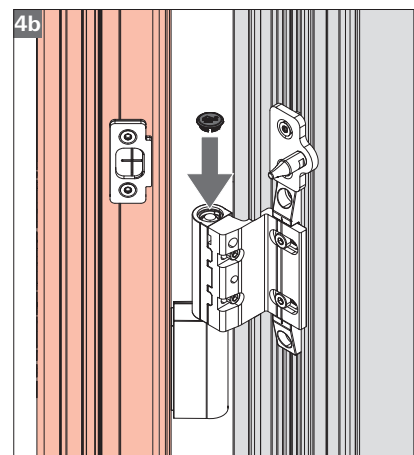

Roto Solid B | 322 P

Hinge retaining mechanism

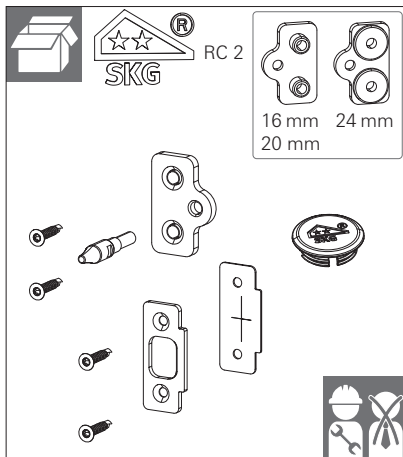

INFO

SKG**

- Hinge retaining mechanism required for outward opening doors.
- Use 3 or more hinges.

INFO

The fixing screws (6.3 x 40, 6.3 x 50 or 6.3 x 60) supplied with the butt hinge must be used for hinge installation.

Screw lengths may vary depending on the profile system.

Pay attention to the installation drawing.

INFO

Note the routing drawing.

